



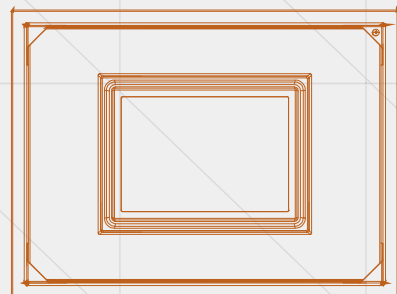


VEGA

The series **VEGA** consists of specially designed illuminators that can be fitted at a low height. Having a robust and reliable structure, the illuminator **VEGA** ensures an easy mounting, being a good alternative to the existing lighting solutions.


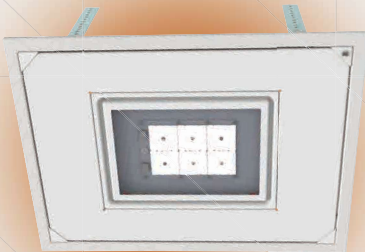


VEGA

- Installation: Gas station lighting
- Colour temperature: warm, neutral, cold
- Colour rendering index: CRI > 80
- Ingress protection: IP65
- Power supply:: 230 V / 50 Hz
- Safety class: I
- Operating temperature range: - 30°C ... + 45°C



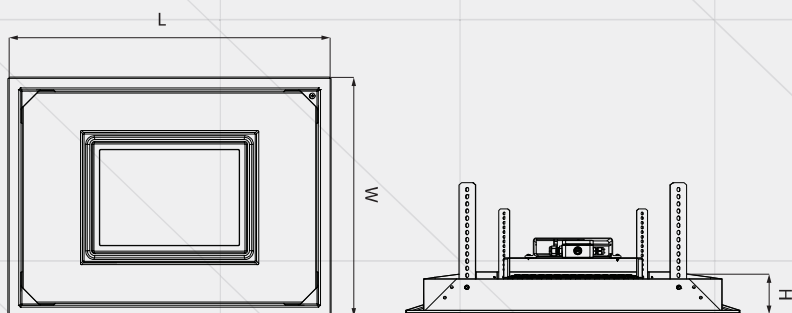


Code	Nominal power	Diffuser	Luminous flux	Dimensions; Weight (L x W x H);(kg)	Light distribution	Observation
RS 81520-001	60 W	polycarbonate	7200 lm	580 x 580 x 256 mm 4,3 kg	B	-
RS 81520-003	75 W	polycarbonate	10000 lm	590 x 440 x 240 mm 4,3 kg	A	-



Compliance standards :
 SR EN 60598-1:2015+AC:2016
 SR EN 60598-2-2:2012
 SR EN 62031:2009+A1:2013+
 A2:2015
 SR EN 55015:2014+A1:2015
 SR EN 61000-3-2:2015
 SR EN 61000-3-3:2014
 SR EN 61547:2010



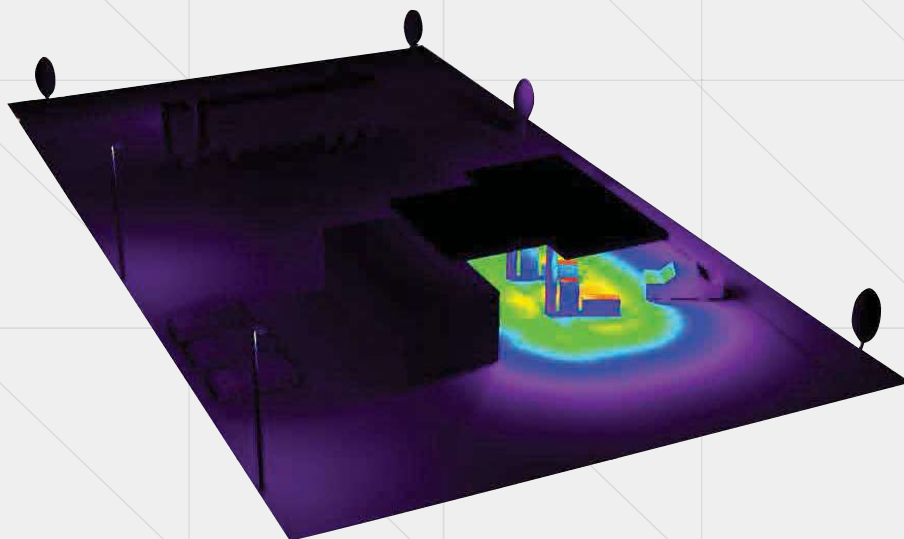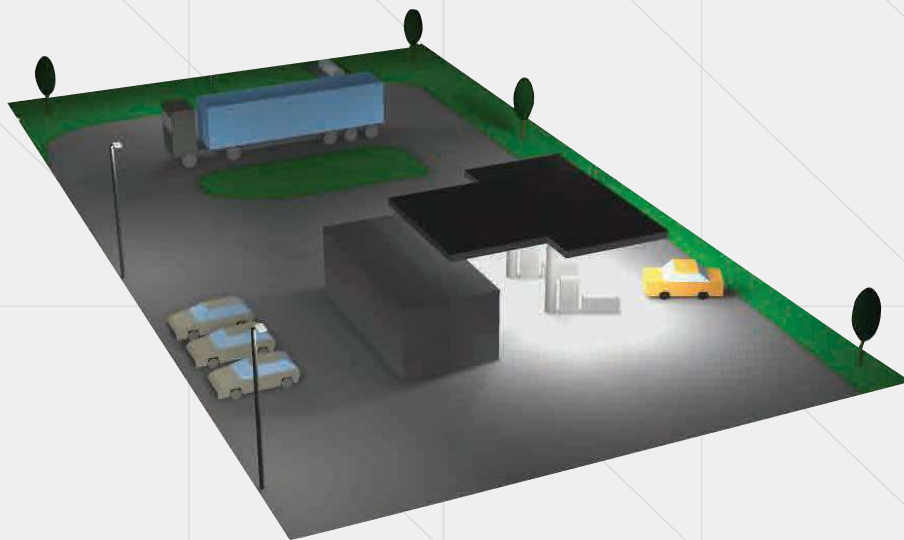

p [%]	Em [lx]	Emin [lx]	Emax [lx]	Em [lx]/Emax
332	139	425	0.419	0.328